

Bonfino

Imported & Marketed by:

Digital Age Retail Private Limited
Rajashree Business Park, Plot No. 114, Survey No. 338, Tadiwala Rd., Near Sohrab Hall,
Pune 411001 Maharashtra, India

For Any Feedback, Contact

Customer Care Executive No.: +91-135-3501241 or E-mail: customercare@darp.in

Customer Care Address: Same as Marketer's address

MADE IN CHINA

Bonfino

Safety Max iSize Convertible Car Seat

Instruction Manual

Age Group

0+

MONTHS



Style Code

BF0BGCS007

Note: Please take a few minutes to read this manual.

This will help you assemble and use the stroller suitably. Keep this manual for future reference.

Before assembly, please double check all parts as shown are included in the package. For any missing or defective parts, or sharp edges, please contact customer service immediately. To guarantee the service life of the car seat, please use it correctly under the instructions and make it through inspection regularly. Never use it if any parts are missing or broken.

Notice

This car seat is a "Universal" child restraint system. It has been approved in accordance with regulation ECE R44/04, and is suitable for general use in vehicles that are fitted with 3 point static or retractable lap and diagonal seat belts approved to ECE R16 and with ISOFIX anchorages approved to ECE R14.

This child restraint is likely to fit if the vehicle manufacturer states that the vehicle approval specifies suitability for "Universal" child restraint systems Class A, B, BI.

This restraint system is classified as "Universal" in accordance with the strictest approval criteria, whereas earlier models do not correspond to these new provisions.

This restraint system is classified as "Universal" use and is suitable for fixing into seat positions according to the vehicle fitting list provided.


If in doubt, contact the manufacturer or retailer of the car seat.

1. Warnings!


1. Ensure that all straps securing the restraint to the vehicle are tightly fastened. Adjust any straps restraining the child to conform to the child's body, and make certain they are not twisted.
2. Confirm that the lap strap is positioned low on the pelvis to securely engage and prevent the child from falling out of the safety car seat.
3. Ensure that the Enhanced Child Restraint System (ECRS) is replaced if it has been subjected to violent stresses during an accident.
4. Verify that rigid items and plastic components of an ECRS are located and installed in a manner that prevents them from becoming trapped by a movable seat or in a door of the vehicle during everyday use.
5. DO NOT modify or add anything to the ECRS without the approval of the Type Approval Authority, and there is a danger of not closely following the installation instructions provided by the ECRS manufacturer.
6. CAUTION: Keep the child seat away from direct sunlight if the seat lacks a textile cover; otherwise, it may become excessively hot for the child's skin.

7. NEVER leave your child unattended in this restraint, even for a brief period.
8. Ensure proper securing of any luggage or objects that could potentially cause injuries in the event of a collision.
9. A) DO NOT utilize the ECRS system without the cover. B) DO NOT substitute the seat cover with any other than the one recommended by the manufacturer, as the cover is an integral part of the restraint's performance.
10. DO NOT employ the ECRS system if the position of the adult safety-belt buckle to the main load-bearing contact points on the restraint is unsatisfactory. Please contact the manufacturer if there are doubts about this point.
11. DO NOT utilize any load-bearing contact points other than those specified in the instructions and marked in the ECRS. Please contact the manufacturer if there are doubts about this point.

2. Structure name

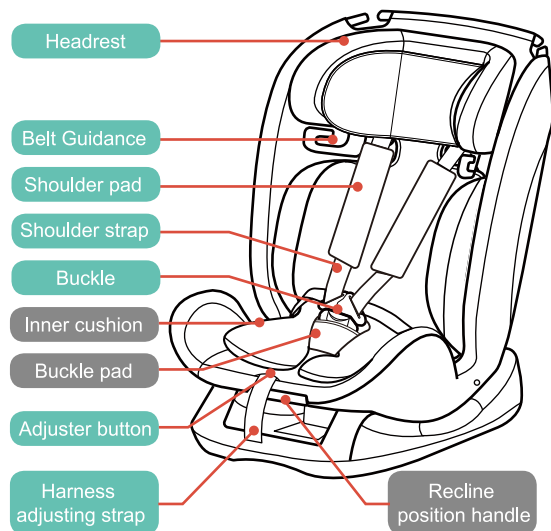


Notice: Inner cushion is suitable for child height of 40-75cm.

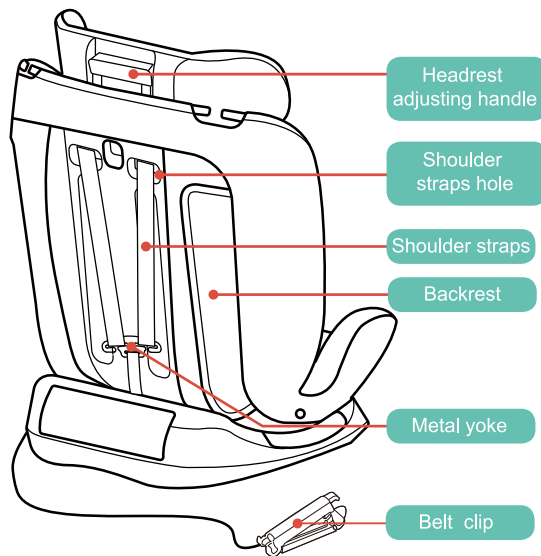


Take care of all spare part, any lost make sure to contact with manufacturer, The parts lack of damaged baby car seats are not allowed to use.

3. Installation position

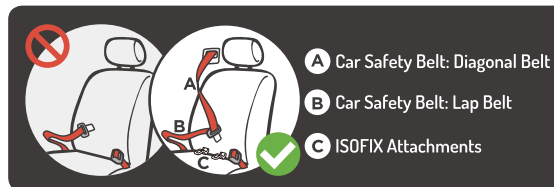

This ECRS system is suitable for seat belt that has passed the ECE R16 requirement and is not suitable for models only equipped with 2-point seat belts.

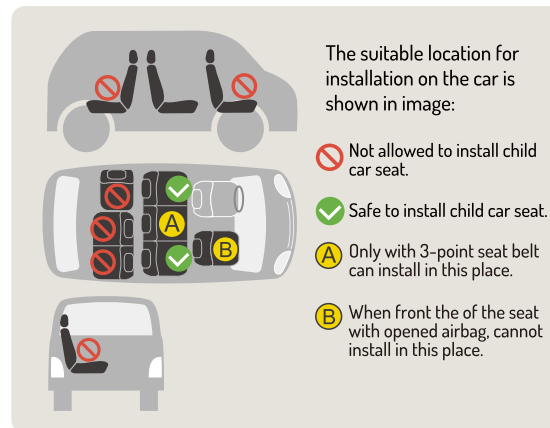


4. Installation with adult safety-belt (40-105cm)

Rearward Facing:

Child height 40cm-105cm


Child weight $\leq 18\text{kg}$

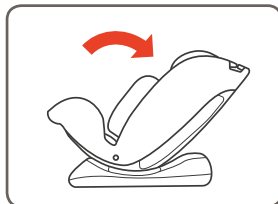


Recline the seat to position '4'.




Put the child seat on installation position with rearward facing.

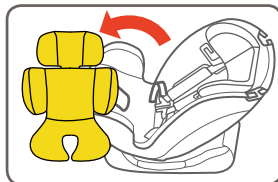


Unlock the harness and lift up the inner cushion.

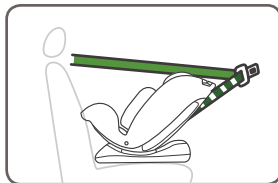


Pull out the seat belt entirely.

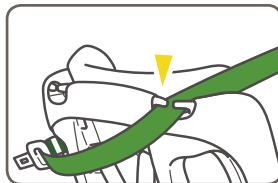


Pass the seat belt through the seat as shown.

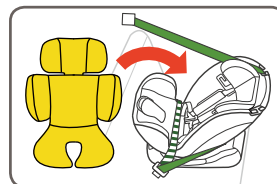


Pass the seat belt through the seat as shown, put the inner cushion back.

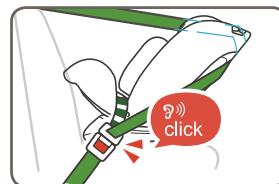


Insert the metal tongue of car seat belt into the car seat buckle until you hear a clear "click".

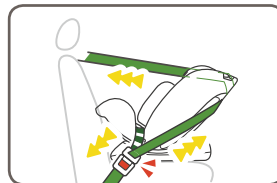

Pull the belt tightly.

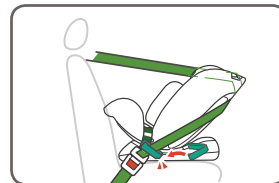

Using the belt clip to clip it beside the buckle.

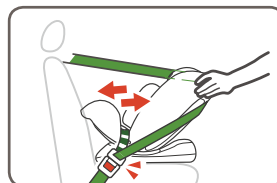


Ensure every strap is tight by moving the child seat belt back and forth.



Tips: Before using the safety seat, make sure the safety seat is firmly installed. The webbing is not twisted.


5. Using 5 point harness to fix child

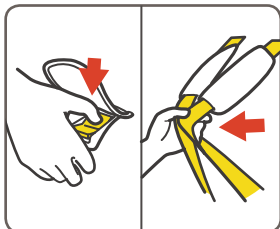


Press the harness adjustment button and fully pull the two shoulder harnesses of the child restraint.



Place the child in the child restraint and pass both arms through the harness.

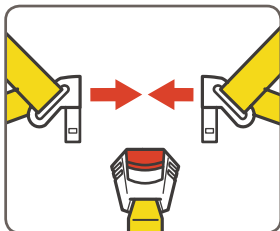


Important: Combine the left and right bolts of the 5-point safety seat buckle first.

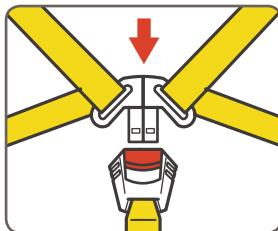


Engage the buckle as shown in the picture.




Tip: Locking one side of the 5-point safety seat buckle is not allowed.

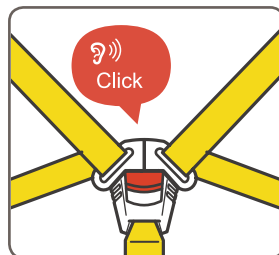


Make sure the buckle is properly engaged.

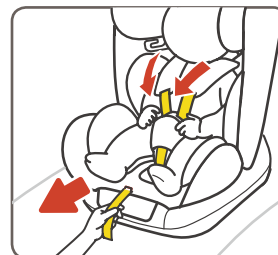

Pull the retractor belt to the right tightness.

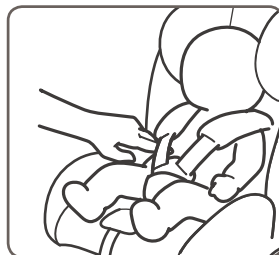

Make sure the space between the child and the shoulder harness is about the thickness of two fingers.

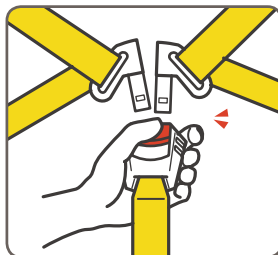

Press the red button to disengage the buckle.

The style of the buckle may vary, depending on the actual receipt.




Warning:
Over-relaxed seat belts are not conducive to protecting children's safety.

6. Installation with adult safety-belt (100-150cm).


Forward Facing:

Child height 100cm-150cm

i-Size Booster seat

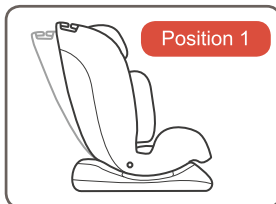


Recline level adjust to level 1, 2 or 3.

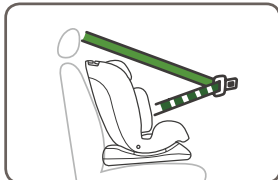


Place child safety seat in car seat. Pull out the seat belt entirely.





The shoulder belt must pass through the shoulder belt guide, and the waist belt must pass through the lap belt guiding.

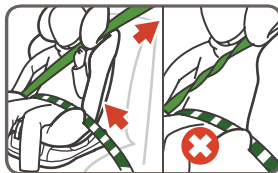


During installation and adjustment of safety belts, ensure that both the shoulder belt and waist belt are not twisted and do not block proper positioning. The correct belt position should be above the child's pelvis.

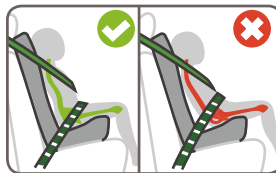

7. Recline adjustment

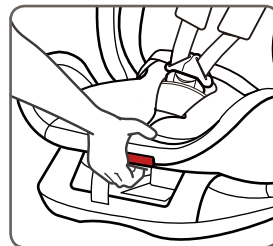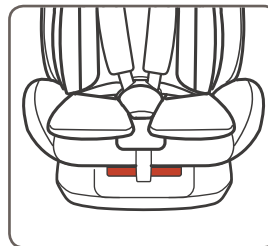

Find the adjust hand lever, pull it up to adjust the position.

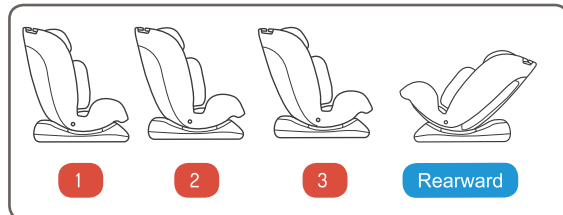


Rearward Facing: Child height 40cm-105cm / Child weight ≤ 18 kg;
The safety seat only provide one position for rearward installation.
Forward Facing: Child height 100cm-150cm could use position 1, 2 or 3.



IMPORTANT - DO NOT USE FORWARD FACING BEFORE THE CHILD'S AGE EXCEEDS 15 months (Refer to instructions)


8. Five point harness adjustment

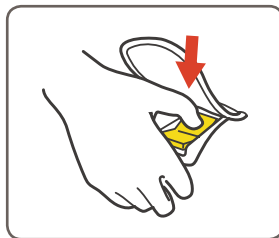

!
Adjusting the harness according to the current situation of child, make sure there no any twisting

Pass the harness adjustment button

To loosen




While pressing the harness adjustment button ,pull completely the two shoulder harnesses of child restraint.

To tighten




Pull down the adjustment webbing and adjust it to the proper length to make sure your child is snugly secured.

9. Head rest adjustment

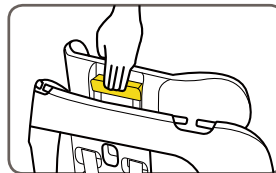


Pull the headrest adjustment handle.

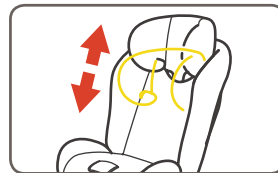


Move the headrest up or down to the appropriate height concurrently


Checking the shoulder strap height



No-Too low



No-Too high




Yes-Correct

Make sure that the harness is on the same height as your child's shoulders. Otherwise, move the shoulder strap up or down to the correct slot.


10. Conceal the harness system (Suitable for child height 100cm-150cm)




Release the 5 - point buckle, pull up the headrest, turn up the back cushion.

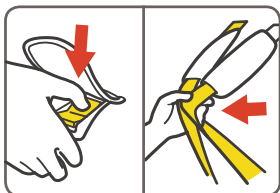


Press the harness adjustment button and loosen the straps.

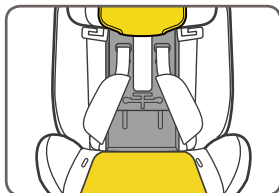


Lift the upper flap upward and pull the lower flap forward.

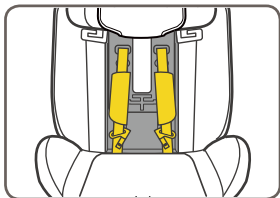


Store the shoulder harnesses and buckle in their storage compartments.

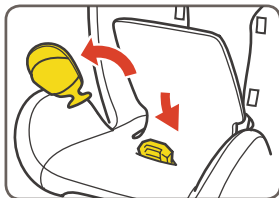

Remove the buckle bag.

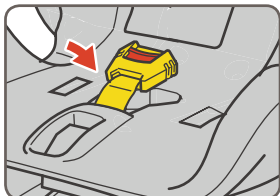


Pull the buckle to the back of the seat pad, and then store the buckle and buckle tongues in respective storage compartments.

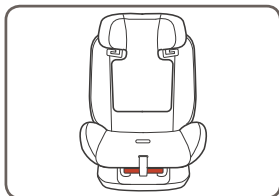


Do reattach the snaps to recover the seat pad. The reassembled seat pad is shown as above picture.


11. Remove the seat cloth cover

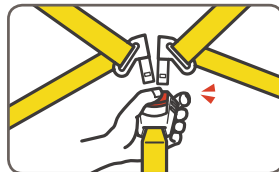

Press the red button to disengage the buckle.

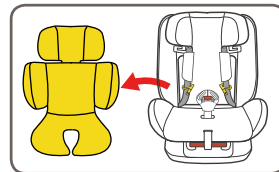


Remove the inner liner.

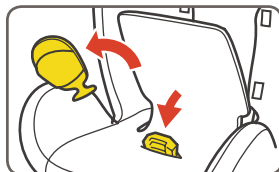


Remove the buckle pad, conceal the buckle in the buckle hole on the seat base.




Raise the back cushion under the headrest.

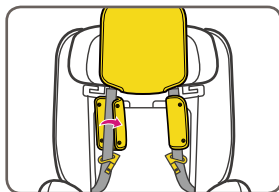


Remove the diagonal belt covers of both sides.

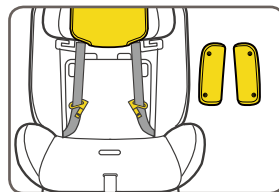

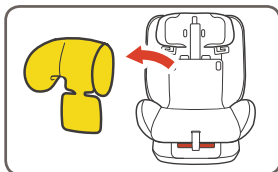

Remove the headrest cloth cover.

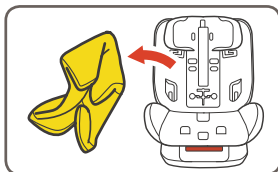

Remove the cloth cover all seats.

Tip: To install the seat cloth cover, follow the steps in reverse order.

Warning: Child restraint system (safety seat) cannot be used without cloth cover.

12.Maintenance

Safety seat maintenance

After removing foam of infant insert, please store it somewhere that the child can not access it.

- Please wash the soft goods with cold water under 30°C.
- Do not iron the soft goods.
- Do not bleach or dry clean the soft goods.
- Do not use undiluted neutral detergent, gasoline or other organic solvent to wash the child restraint. It may cause damage to child restraint.
- Do not twist the goods to dry with great force, it may leave the soft goods with wrinkles.
- Please hang dry the soft goods in the shade.



⚠ Warning

Child restraint system (safety seat) without cloth cover cannot be used.

Safety seats save.

Please always check the seat parts are complete, the seat is in good condition to reduce the chance of accidents. Please remove the child restraint from the vehicle seat if not in use for a long period time. Put the child restraint in the shade and somewhere your child can not access it. Please do not leave the seat in a cold or hot, humid environment for long periods of time. Please keep this instruction well for future reference.

Post-accident treatment

In the event of a violent collision and accident, please replace it with a new seat. If you have any other questions, please contact the distributor or manufacturer.